

# Digital Watermarking Based on the Log-Polar Mapping

Mr. Somanath K. Chikane<sup>1</sup>, Prof. S.K. Bhatia<sup>2</sup>

<sup>1</sup>Department of Electronics and Telecommunication Engineering, PG Student, ICOER, Pune, India

<sup>2</sup>Department of Electronics and Telecommunication Engineering, ICOER, Pune, India

<sup>1</sup>[somnathchikane111@gmail.com](mailto:somnathchikane111@gmail.com), <sup>2</sup>[sukhwinderkaur1@gmail.com](mailto:sukhwinderkaur1@gmail.com)

**Abstract:** In digital watermarking techniques, the geometrical attacks are still an open problem. Affine transforms can be used for describing Most of geometrical attacks. This paper deals with digital watermarking of images robust against the affine transformations. Here the new approach to improve robustness against geometrical attacks is developed. The discrete Fourier transform (DFT) and log-polar mapping (LPM) is used for watermark embedding and for watermark detection.

**Keywords:** Digital watermarking, geometrical attacks, discrete Fourier transform, log-polar mapping

## I. INTRODUCTION

The desire for the availability of information and quick distribution has been a major factor in the development of new technology in the last decade. There is the increased use of multimedia across the Internet. Multimedia distribution has become an important way to deliver services to people around the world. It is commonly applied in Internet marketing campaigns and electronic commerce web sites. Due to the growing usage of multimedia content on the Internet, serious issues have emerged. Counterfeiting, forgery, fraud, and pirating of this content are rising. Virtually anyone with a sound card, scanner, video frame grabbers, or multimedia authoring systems allow them to incorporate copyrighted material into presentations, web designs, and Internet marketing campaigns. Consequently, copyright abuse is rampant among multimedia users who are rarely caught. This copyright abuse is the motivating factor in developing new encryption technologies. Progress in digital data processing has brought many advantages into the data transmission, storage, copying and so on. But some

advantages in one way can be disadvantages in other way. The easy processing of the digital multimedia has caused that the illegal digital copy can be made in exactly the same quality as the original, may be created at low cost and can be transmitted very easily through the networks. These reasons have established the question of the ownership rights protection in multimedia data.

There are two approaches to the multimedia data protection: Multimedia protection during the transmission and multimedia protection after the transmission. The multimedia protection during the transmission is based on the usage of cryptographic algorithms. Cryptographic algorithms can be divided into the two main groups: symmetric or secret-key algorithms, and asymmetric or public-key algorithms. But these cryptographic algorithms protect the multimedia only during the transmission. After the decryption in the receiver multimedia terminal multimedia are not protected anymore and data may be copied easily and without quality degradation.

The protection after the transmission and decryption can be achieved by adding some information into the multimedia data in which the information about the multimedia source, about the author or about the permission for further multimedia processing can be included. The art of inserting information into multimedia data in a robust and invisible manner is known as a **digital watermarking**.

In digital watermarking as tools for the protection of ownership rights and copy prohibition, there are lots of processes performed by unauthorized persons which aim to corrupt the embedded information. These processes are called **attacks**. There are various categorizations of attacks on watermarks. One from the categorization, presented in [4], is

categorization into four main groups:

- removal attacks,
- geometrical attacks,
- cryptographic attacks,
- Protocol attacks.

Removal attacks achieve complete removal of the watermark information from the watermarked data without cracking the security of the watermarking algorithm. This category includes denoising, lossy compression, quantization, demodulation, collusion, and averaging attacks.

Geometrical attacks do not remove the embedded watermark itself, but intend to distort the watermark detector synchronization with the embedded information. Cropping, flip, rotation, shift, scaling, translation and so on belong to the category of the geometrical attacks.

Cryptographic attacks aim at cracking the security methods in watermarking schemes and thus finding a way to remove the embedded watermark information or to embed misleading watermarks. These attacks are very similar to the attacks used in cryptography. There are the brute force attacks which aim at finding secret information through an exhaustive search.

Protocol attacks aim at attacking the entire concept of the watermarking application. This category includes the copy attack and the attacks made by invertible watermarks.

The geometrical attacks on the digital watermarks are still an open problem for many watermark algorithms used in present time. A few approaches to improve the robustness against geometrical attacks are presented in papers [1], [2], [3], [5].

The methods capable to estimate and recover the undergone global affine transformations can be divided into three main groups:

**Invariant watermarks.** The transform invariant domain approach mostly consists in the application of the Discrete Fourier Transform (DFT) followed by the log- polar (LPM) or a log-log coordinate mapping. And the watermark is embedded into the image by the modification of the DFT magnitude. This DFT followed by the LPM is the same as the Fourier-Mellin transform. The watermarks, which use the Fourier-Mellin transform, are designed to be robust mainly against the rotation, scales and translations.

**Template based schemes.** In this case, the watermark consists of two parts: template and the self-watermark. The template contains no information but is merely a tool used to recover possible transformations in the image. The recovery

of the watermark is a two stage process. First, the transformation undergone by the image is determined, and then inversion or compensation for the transformation when decoding the watermark is done. The points of the template may be distributed for example in the DFT domain.

**Autocorrelation techniques.** The third method for the recovery of geometrical transformations is the use of the autocorrelation function. These methods are based on the adding of the repeated watermarks in the overlapping fashion. At the detection, the estimation of the watermark is performed and the autocorrelation function is calculated. The peaks in the auto-correlation function are obtained due to the repetitive insertion of the watermark. Since the autocorrelation of the inserted watermark is known, this is compared with the autocorrelation function of the recovered watermark. A transformation matrix is calculated based on the two sets of peaks. This transformation is then inverted and the watermark is decoded.

## II. AFFINE TRANSFORMATIONS

Most of geometrical attacks can be uniquely described using the paradigm of general affine transforms, that can be represented by the 4 coefficients  $t_{11}$ ,  $t_{12}$ ,  $t_{21}$ ,  $t_{22}$  forming a matrix  $T$  for the linear component, plus the two coefficients  $\tau_x$ ,  $\tau_y$ , for the translation part of the transform. The affine transform maps each point of Cartesian coordinates from  $(x, y)$  to  $(x', y')$ . This transform can be depicted in the following form

$$\begin{pmatrix} x' \\ y' \end{pmatrix} = T X \begin{pmatrix} x \\ y \end{pmatrix} + \tau = \begin{pmatrix} t_{11} & t_{12} \\ t_{21} & t_{22} \end{pmatrix} X \begin{pmatrix} x \\ y \end{pmatrix} + \begin{pmatrix} \tau_x \\ \tau_y \end{pmatrix}$$

Where “ $\times$ ” represents the matrix product. The  $\tau$  component corresponds to the cropping and the translation. The different values of the  $t_{ij}$  components in the matrix  $T$  represent the different types of the affine transforms.

The parameters of the transformation for a **rotation**  $R(\theta)$  of a certain angle  $\theta$  are

$$T(\theta) = \begin{pmatrix} \cos(\theta) & -\sin(\theta) \\ \sin(\theta) & \cos(\theta) \end{pmatrix}; \begin{pmatrix} \tau_x \\ \tau_y \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \end{pmatrix}$$

For **scaling**  $S(\rho)$  factors  $\rho_x$  and  $\rho_y$  applied, respectively, to the horizontal and vertical axes, the transformation parameters are

$$T(\rho_x, \rho_y) = \begin{pmatrix} \rho_x & -\sin(\theta) \\ 0 & \rho_y \end{pmatrix}; \begin{pmatrix} \tau_x \\ \tau_y \end{pmatrix} = \begin{pmatrix} 0 \\ 0 \end{pmatrix}$$

The parameters for **translation**  $T(h, v)$  in a  $x$  and  $y$  directs of a  $h$  and  $v$  pixels are

$$T(h, v) = \begin{pmatrix} 1 & 0 \\ 0 & 1 \end{pmatrix}; \begin{pmatrix} \tau_x \\ \tau_y \end{pmatrix} = \begin{pmatrix} h \\ v \end{pmatrix}$$

## I. LOG-POLAR MAPPING

As it was mentioned before, the exploitation of the features of some transformations which are invariant against the affine transformations can be used to improve robustness of watermarks against the geometrical attacks. Discrete Fourier transform (DFT) full fill these requests and is often being used in the digital watermarking algorithms. If the picture is defined as two dimensional function  $x(i, j)$  in the Cartesian coordinate system with limitations  $0 \leq i < N1$  and  $0 \leq j < N2$ , the DFT and inverse DFT is defined as follows

$$F(u, v) = \sum_{i=0}^{N1-1} \sum_{j=0}^{N2-1} x(i, j) e^{-j(\frac{2\pi}{N1})ui} e^{-j(\frac{2\pi}{N2})vj}$$

$$x(i, j) = (1/N1N2) \sum_{p=0}^{N1-1} \sum_{q=0}^{N2-1} F(u, v) e^{j(\frac{2\pi}{N1})ui} e^{j(\frac{2\pi}{N2})vj}$$

Affine transforms performed with images in the spatial domain caused the specific changes in the DFT domain.

The **picture shift** in the spatial domain causes a linear shift in the phase component of the DFT

$$F(k1, k2) e^{-j(\gamma_x k1 + \gamma_y k2)} \leftrightarrow f(x + \gamma_x, y + \gamma_y)$$

The symbol  $\leftrightarrow$  represents the transform relationship between DFT domain and the image spatial domain. Note that both  $F(k1, k2)$  and  $f(x, y)$  are periodic functions so the translations cause the image to be “wrapped around” and this feature is called **circular translation**

**Scaling the axes** in the spatial domain causes an inverse scaling in the frequency domain

$$\frac{1}{\rho} F\left(\frac{k1}{\rho}, \frac{k2}{\rho}\right) \leftrightarrow f(\rho x, \rho y)$$

The **image rotation** through an angle  $\theta$  in the spatial domain causes the DFT representation to be rotated through the same angle

$$F(k_1 \cos\theta - k_2 \sin\theta, k_1 \sin\theta + k_2 \cos\theta) \leftrightarrow (x \cos\theta - y \sin\theta, x \sin\theta + y \cos\theta)$$

From equation (7) it is clear that spatial shifts affect only the phase representation of the image. Also equations (8) and (9) can be rewritten by using the specific substitution. The changes in the image caused by scaling and image rotation in the spatial domain can be described by invariant shift after this substitution. This can be performed by the substitution which is called **log-polar mapping (LPM)**.

Consider a point  $(x, y) \in \mathbb{R}^2$  and define  $x = \mu \cos\theta$ ,  $y = \mu \sin\theta$ , where  $\mu \in \mathbb{R}$  and  $0 \leq \theta < 2\pi$ . The result of this substitution is that for every point  $(x, y)$  there is a point  $(\mu, \theta)$  that uniquely corresponds to it. The new coordinate system  $(\mu, \theta)$  converts the scaling and rotation into the simple translation in the direction of the axis.

**Scaling** is converted to a translation  $(\rho x, \rho y) \leftrightarrow (\mu + \log \rho, \theta)$

**Rotation** is converted also to a translation

$$(x \cos(\theta + \delta) - y \sin(\theta + \delta), x \sin(\theta + \delta) + y \cos(\theta + \delta)) \leftrightarrow (\mu, \theta + \delta)$$

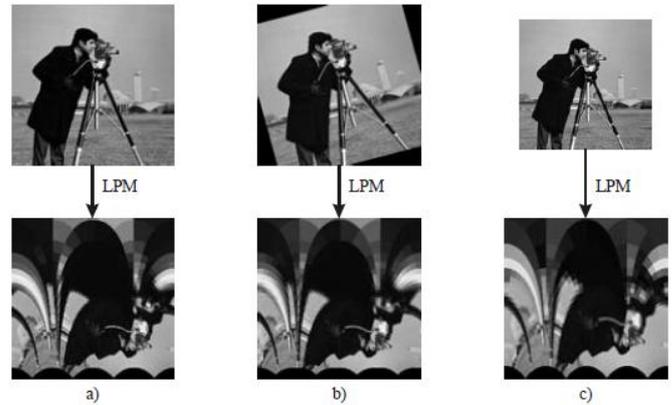


Fig. 1. Image and corresponding LPM a) original image, b) rotated image, c) scaled image

## II. PROPOSED WATERMARKING METHOD

The proposed algorithm is based on the combination of the DFT and LPM features. Watermark is in the form of sparse matrix which is created depending on the sequence of the alphanumeric values. The watermark is inserted into the original picture in the DFT domain. During the embedding process the hash function RIPEMD-160 is used for the algorithm security improvement. On the receiver side, the watermark is not extracted but only detected. That means there is a binary decision process about the presence or the absence of the watermark in the image.

### 4.1 Watermark Embedding

The entries of the watermark embedding process are the original gray scale image  $I$  and the key  $K$ , which is in the alphanumeric form and after the processing by hash function is used as the initialization vector for the pseudorandom generator. The process of the watermark embedding is shown in Fig. 2 and can be described in five steps:

- DFT of the original image  $I$ ,
- watermark generation based on the secret key  $K$ ,
- transformation of the key by using inverse LPM,
- watermark embedding into the chosen coefficients of the magnitude spectrum of the DFT,
- Inverse DFT.

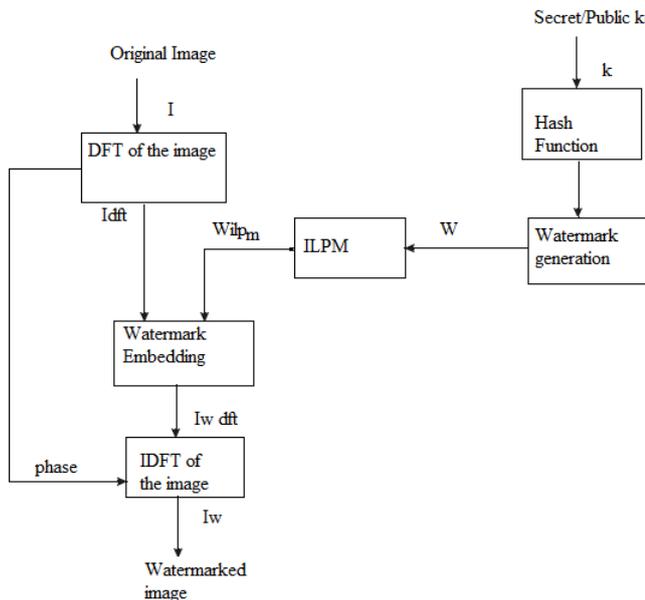


Fig.2 embedding method

The calculation of the DFT of the original image is the first step in the watermark embedding process. The secret key  $K$  is used as the input for the RIPEMD-160 hash function. The output of the hash function is used as the initialization vector for the pseudorandom generator. Generated pseudo-random sequence has normal dispersion and zero mean value and based on the chosen decision level is mapped into the two values (0,1) (Fig. 3). The size of the sequence is selected based on the desired quality of the watermarked image and on the desired robustness of the embedded watermark against the attacks.



Fig. 3. Pseudorandom sequence and sequence mapped on the values (0,1).

The size of the watermark has to be the same as the size of the original image. Generated and mapped sequence is situated in the lower part of the watermark (Fig. 4). The quality of the watermarked image is influenced by the location of the sequence in the watermark, the size of the sequence and by

thdensity of the ones in the sequence.



Fig. 4. Embedded watermark.

The next step in the embedding process is the transformation of the watermark by using inverse log-polar mapping (ILPM). The location of the pseudorandom sequence in the watermark is selected by following DFT and LPM properties. Watermark and its ILPM are shown in Fig. 5.

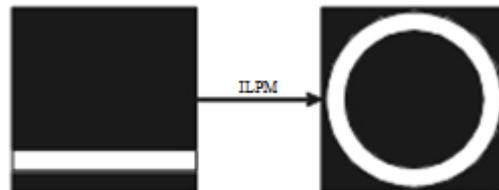


Fig. 5. Watermark and its inverse log-polar mapping.

As can be seen in Fig. 5, the ILPM transforms the pseudorandom sequence in the watermark into the concentric ring. In the DFT spectrum the medium frequencies are situated in this region. These frequencies are chosen for the watermark embedding for two reasons:

- Modification of medium frequencies causes less degradation of the watermarked image as the modification of the lower frequencies would cause,
- If the higher frequencies are modified during the watermark embedding process, the watermark robustness would be low against the attack, mainly against loss compressions.

The location of the concentric ring in the ILPM domain can be modified by the vertical shifting of the pseudorandom sequence in the watermark (Fig. 6). The watermark is embedded into the magnitude coefficients of the DFT in the form of local peaks. The process of the embedding is adaptive, that means the watermark is not embedded into the whole picture with the same power. The process of the watermark embedding can be described as

$$I_{DFT}^W(i, j) = \begin{cases} \frac{\alpha}{9} \sum_{i-1}^{i+1} \sum_{j-1}^{j+1} I_{DFT}(i, j) & \text{if } W_{ILPM}(i, j) = 1 \\ I_{DFT}(i, j) & \text{if } W_{ILPM}(i, j) = 0 \end{cases}$$

Where  $\alpha$  (alfa) is the power of the embedded watermark.

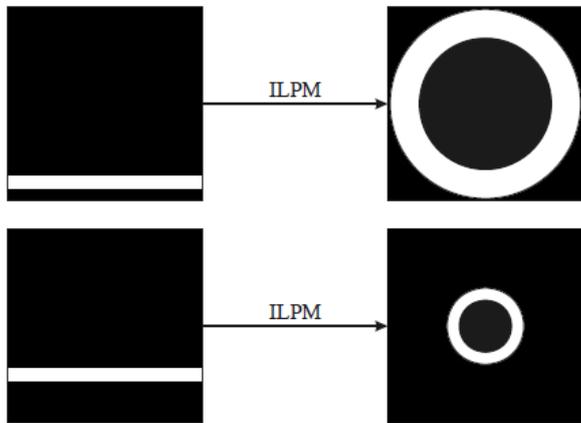


Fig. 6. Vertical shifting of the pseudorandom sequence.

The inverse DFT is the final step in the watermark embedding process and the watermarked images are obtained

#### 4.2 Watermark Detection

The detection algorithm does not require the original image and is based on the correlation test between the original and extracted watermark. The algorithm entries are tested image and secret key  $K$  for the watermark generation. The process of the watermark detection is shown in Fig. 8 and can be described in five steps:

- DFT transformation of the tested image,
- position finding of the local maxima,
- LPM transformation of the local maxima,
- watermark generation by using secret key  $K$ ,
- correlation test,
- decision about the presence or absence of the watermark in the tested image

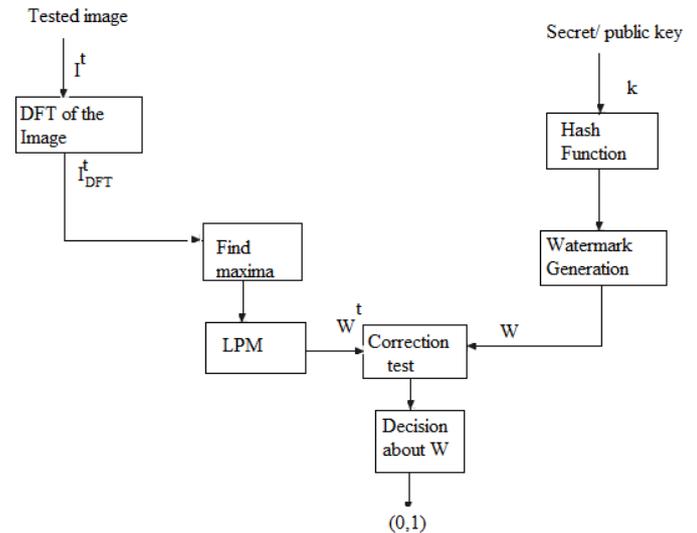


Fig.7 Decoding method

The DFT is the first step in the watermark extraction process. The local maxima are searched in the small non overlapping windows. In the experiments the window with 10x14 pixels was used. The positions of all founded local maxima are saved into the empty matrix. This matrix represents the extracted watermark. In the next step, the local maxima are transformed by using LPM (Fig. 9) and the correlation test between the original and tested watermark is calculated. The decision about the watermark presence or absence is based on the chosen level of the correlation function.

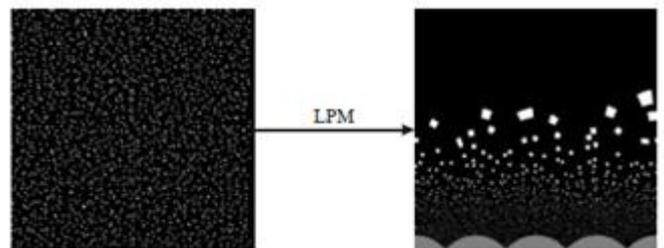


Fig.8 LPM of the founded maxima

## V. EXPERIMENTAL RESULTS

In the experiments, five different images were used and five different watermarks were added into each image. Examples of one watermarked image with embedded watermarks are shown in Fig. 7. Three different powers of the  $\alpha$  parameter during the watermark embedding process were used. The robustness of the embedded watermarks was tested against some attacks.

## VI. CONCLUSION

In this paper one approach how to improve robustness of the digital watermarks in gray scale images based on the DFT and LPM was shown. As it was demonstrated by providing some types of attacks, the proposed watermarking method is highly robust against the geometrical attacks. The further work will be oriented on the improving of the robustness against the removal attacks, mainly the loss compressions and the exploitation of the human visual system in the watermark embedding process for the better hiding the watermark into the original image.

- [1] S. M. Metev and V. P. Veiko, *Laser Assisted Microtechnology*, 2nd ed., R. M. Osgood, Jr., Ed. Berlin, Germany: Springer-Verlag, 1998.
- [2] J. Breckling, Ed., *The Analysis of Directional Time Series: Applications to Wind Speed and Direction*, ser. Lecture Notes in Statistics. Berlin, Germany: Springer, 1989, vol. 61.
- [3] S. Zhang, C. Zhu, J. K. O. Sin, and P. K. T. Mok, “A novel ultrathin elevated channel low-temperature poly-Si TFT,” *IEEE Electron Device Lett.*, vol. 20, pp. 569–571, Nov. 1999.
- [4] M. Wegmuller, J. P. von der Weid, P. Oberson, and N. Gisin, “High resolution fiber distributed measurements with coherent OFDR,” in *Proc. ECOC’00*, 2000, paper 11.3.4, p. 109.
- [5] R. E. Sorace, V. S. Reinhardt, and S. A. Vaughn, “High-speed digital-to-RF converter,” U.S. Patent 5 668 842, Sept. 16, 1997.
- [6] (2002) The IEEE website. [Online]. Available: <http://www.ieee.org/>
- [7] M. Shell. (2002) IEEETran homepage on CTAN. [Online]. Available: <http://www.ctan.org/tex-archive/macros/latex/contrib/supported/IEEETran/>
- [8] *FLEXChip Signal Processor (MC68175/D)*, Motorola, 1996.
- [9] “PDCA12-70 data sheet,” Opto Speed SA, Mezzovico, Switzerland.
- [10] A. Karnik, “Performance of TCP congestion control with rate feedback: TCP/ABR and rate adaptive TCP/IP,” M. Eng. thesis, Indian Institute of Science, Bangalore, India, Jan. 1999.
- [11] J. Padhye, V. Firoiu, and D. Towsley, “A stochastic model of TCP Reno congestion avoidance and control,” Univ. of Massachusetts, Amherst, MA, CMPSCI Tech. Rep. 99-02, 1999.
- [12] *Wireless LAN Medium Access Control (MAC) and Physical Layer (PHY) Specification*, IEEE Std. 802.11, 1997.